



LEGEND SERIES

Advantages for
the operator



Modern and innovative design.



Technology consolidated by Ravaglioli's many years of engineering expertise.



Quick vehicle positioning and convenient door opening.



Energy kit
(230 V - compressed air) on selected models.



Push button controls (only in models with TEq-Link).



Cleaner workplace thanks to internal trolleys.



Lifts designed for easier and faster maintenance.



Lifts with quick-connect arm ends for quick assembly and use of the corresponding accessories.



Accessory configuration example:

VSG.2CALL.901163



VSG.2CALL.901071



KPX32-KPX35

Overall dimensions: 3350 mm - 3250 mm
Adjustable distance: 2700 mm - 2600 mm

KPX42-KPX55

Overall dimensions: 3528 mm - 3428 mm
Adjustable distance: 2800 mm - 2700 mm



Acoustic foot protection system. (CE-stop, no mechanical foot guards).



TEq-Link on selected models for:

- View statistics of lift usage.
- Check the preventive maintenance.
- Manage workstations.
- Manage work orders.



50% longer, bronze load nut.



Motors with reinforced and cooling casing.



Solid automatic arm locking.



Aluminum pulley with cooling function.




Long lasting bearings.

LIFTABLE VEHICLES

The design of the arms allows optimal and versatile loadability for a wide range of vehicles.


Technical drawing of KPX32 model
(To view technical drawings of the other models in the series, please visit the product page on the website)

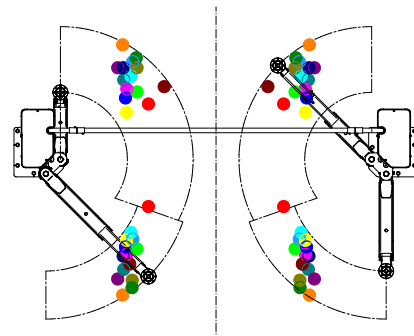

- | | |
|------------------|--------------------|
| ● SMART | ● AUDI - A3 |
| ● BMW - G12 | ● VW - TOURAN |
| ● BMW - Z4 | ● AUDI - Q7 |
| ● BMW - i3 | ● VW - ID4 |
| ● BMW - E83 | ● AUDI - Q4 E-TRON |
| ● RENAULT - CLIO | ● TESLA - MODEL X |
| ● VW - TIGUAN | ● RENAULT - ZOE |

A new range of accessories to intensify performance.





Columns turned
with corner
carriages.

KPE32
KPX32-KPX35
KPX42
KPX55


3200 kg





KPX32 - 3200 kg
KPX35 - 3500 kg



4200 kg



5500 kg



Discover the whole series.



	Item no.	Control	Energy kit	Double control panel	TEq-Link	Driving power	Power supply
KPE32	RAV.KPE32.198662	rotating switch				2x2.6 kW	400 V 50 Hz
KPX32	RAV.KPX32.198570	switch				2x2.6 kW	400 V 50 Hz
KPX32P	RAV.KPX32.198624	push buttons	✓		✓	2x2.6 kW	400 V 50 Hz
KPX35	RAV.KPX35.199010	push buttons			✓	2x2.6 kW	400 V 50 Hz
KPX35E	RAV.KPX35.199157	push buttons	✓		✓	2x2.6 kW	400 V 50 Hz
KPX42	RAV.KPX42.198259	push buttons			✓	2x3.5 kW	400 V 50 Hz
KPX42E	RAV.KPX42.198303	push buttons	✓	✓	✓	2x3.5 kW	400 V 50 Hz
KPX42LIK	RAV.KPX42.198440	push buttons			✓	2x3.5 kW	400 V 50 Hz
KPX42ELIK	RAV.KPX42.198488	push buttons	✓	✓	✓	2x3.5 kW	400 V 50 Hz
KPX55LIKTA	RAV.KPX55.198945	push buttons			✓	2x3.5 kW	400 V 50 Hz
KPX55ELIKTA	RAV.KPX55.198976	push buttons	✓	✓	✓	2x3.5 kW	400 V 50 Hz